


Features


- Adjustable lights on aluminum extrusion
- 300mm x 300mm Area or 600mm x 600mm
- Lights can be connected and strobed together or separate
- Driver built in – No External wiring to a driver
- PNP and NPN Strobe input
- Continuous operation or Strobe mode
- Dimmable via built in potentiometer
- Analog intensity via 0-10VDC signal
- Standard optics provide tight light pattern



Lights adjustable 90 degrees – Full vertical to horizontal swing

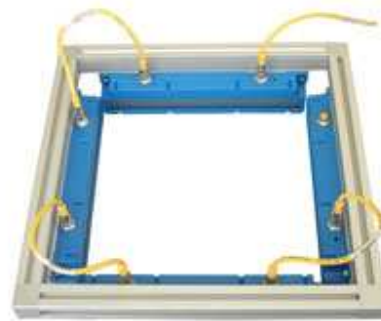

Electrical Input	Voltage - 24 VDC +/- 10%
Analog Intensity	The output is adjustable from 10-100% of brightness by a 0 -10 VDC signal
Dimmable	The output is manually adjustable from 10-100% of brightness by potentiometer
Continuous Mode	Light will be in continuous mode by leaving signal on strobe input
Strobe	PNP ► +5VDC or greater to activate. NPN ► GND (<1VDC) to activate
Strobe Mode	The Light will operate in either continuous or strobe mode. In strobe mode, the output pulse width will track the pulse width of the strobe pulse.



1 = 24VDC
2 = NPN STROBE
3 = GND
4 = PNP STROBE
5 = 0-10VDC Analog

Standard M12 mating cable color code:

BROWN
WHITE
BLUE
BLACK
*GRAY (GREEN/YELLOW)

* 5 pin Standard M12 mating cable must be used: +VDC must be connected to pin 5 if Analog 0-10 VDC is not used.